


GA6B & GM6B SERIES POWER TAKE-OFF


PARTS LIST



FOR THE ALLISON 1000 & 2000 SERIES AUTOMATIC TRANSMISSION

Muncie Power Products, Inc.

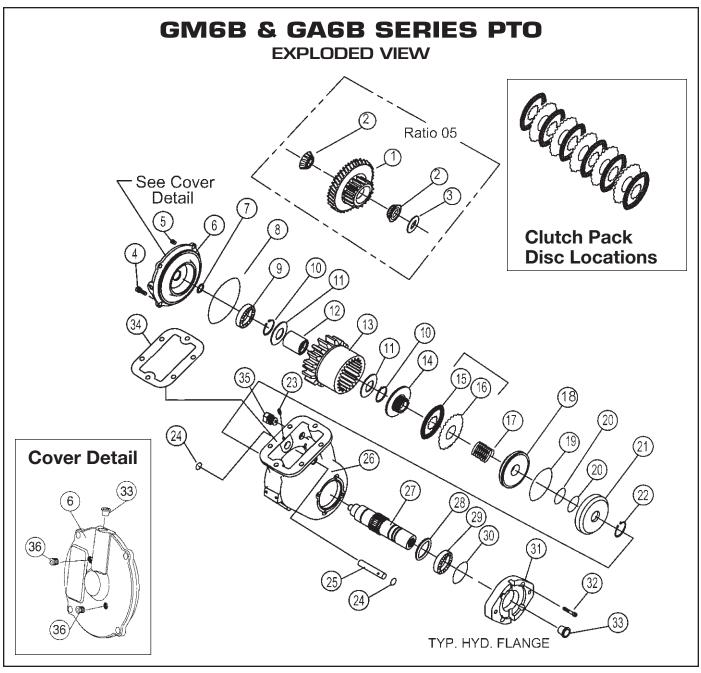

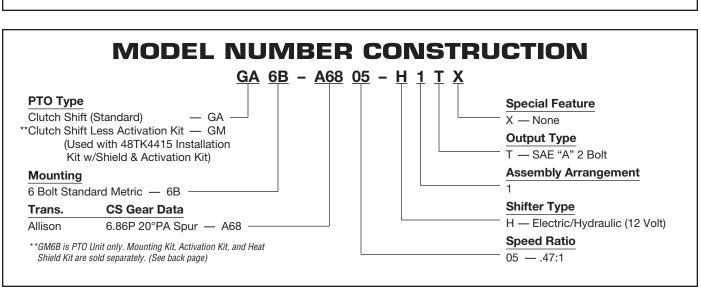


SERVICE PARTS LIST AND DESCRIPTION

GA6B-A6805-H1TX • GM6B-A6805-H1TX

ITEM	QTY	PART NUMBER	DESCRIPTION
NS	2	25T37702	Capplug
1	1	03T37351	Gear
2	2 1	10T37736	Bearing
*3		18T35783	Shim (.115/.113)
	1	18T35782	Shim (.120/.118)
	1	18T35781	Shim (.125/.123)
	1	18T36230	Shim (.130/.128)
	1	18T36229	Shim (.135/.133)
	1	18T37151	Shim (.140/.138)
	1	18T37152	Shim (.145/.143)
	1	18T37153	Shim (.150/.148)
4	4	19T35237	Capscrew
5	2 1	25T21684	Pipe Plug
6 7		15T37350	Cover
	1	12T36081	0-Ring
8	1	12T34003	0-Ring
9	1	10T21017	Bearing
10	2 2	24T35480	Snapring
11	2	21T29017	Race
12	1	10T37008	Bearing
13	1	02T37352	Gear
14	1	02T37338	Clutch Hub

ITEM	QTY	PART NUMBER	DESCRIPTION	
15	6	49T37345	Clutch Friction Disk	
16	5	49T37346	Clutch Stator	
17	1	27T36112	Spring	
18	1	49T37347	Piston	
19	1	12T36186	0-Ring	
20	2	12T36471	0-Ring	
21	1	49T37348	Cup	
22	1	24T36470	Snapring	
23	1	19T35785	Setscrew	
24	2	12T35774	0-Ring	
25	1	07T37071	Shaft-Input	
26	1	01T37259	Housing	
27	1	06T37953	Shaft-Output	
28	1	18T37737	Spacer	
29	1	10T37229	Bearing-Sealed	
30	1	12T36277	0-Ring	
31	1	14T37735	Flange	
32	4	19T33233	Capscrew-Hex Head	
33	1	25T37387	Capplug	
34	2	13M13541	Mounting Gasket	
35	1	25T37761	SAE Reducer	
36	2	25T21684	Pipe Plug	
*One Sh	*One Shim used as required for correct bearing load002" to .006" loose.			

GA6B & GM6B SERIES DIMENSIONS

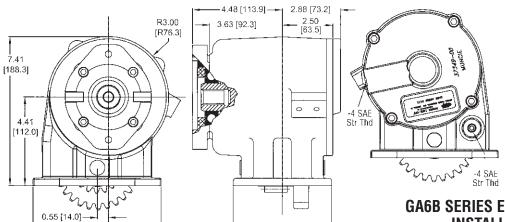

-4.88 [124.0]-

48TK4212 GA6B-A68 PTO KIT

QTY	PART NO.	DESCRIPTION
1	52MK1009	Gasket Instruction Pack
1	20TK4058	Stud Kit (see p4)
1	36MK3841	Safety Labels
1	48TK4211	Installation Kit GA Series (Content Below)

GA6B SERIES ELECTRIC/HYDRAULIC SHIFT INSTALLATION KIT 48TK4211


	•		
To Transmission Main Pressure Port (Fitting Not Provided. Order 43M68014 Separately)		# Solenoid to compartme of road con ## Green light	d with Standard Kit. Order Muncie Separately. be mounted in engine nt out of direct spray
Optional EOS-110 Overspeed Control	Cut here for EOS Inst.	13	(1) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4

-6.36 [161.7]-

ITEM	QTY	PART NO.	DESCRIPTION
		30T36270	Switch Ass'y 12V (Incl. 1, 2, 3, 4)
1	1	36MA1005	Switch Bracket
2	1	36M01006	Face Plate w/Light Access
3	1	36T36271	Face Plate w/o Light Access
4	1	30T35687	Rocker Switch 12V
N.S.	1	36MK1007	Mtg. Hardware (w/Switch Kit)
5	1	33T36299	Fuse Assembly
6	1	35T37928	12V Solenoid Valve
			(Service Parts see page 4)
7	1	30T37954	Pressure Switch
9	1	34T36941	Wiring Pigtail
10	2	43T36431	Straight, Adapter ODT to JIC
13	3	34M18250	Female Spade Connector
14	2	34M18009	Ring Terminal
15	12	37M18000	Electric Wire 12ft.
16	3	43M68014	Elbow, Adapter ODT to JIC
17	1	34MA1415	Wire Harness Connector
18	2	34T36362	End Crimp Connector
N.S.	2	19T36623	Solenoid Mounting Capscrew

GM6B INSTALLATION KITS

INSTALLATION KITS FOR GM6B PTO - SOLD SEPARATELY

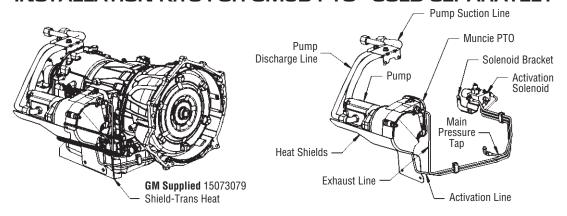

GM6B-A6805-H1TX

(for complete installation instructions see IN01-03 manual)

48TK4962 INSTALLATION KIT (Model Year 2007 & Later) TUBING/SHIELD USED WITH GM6B PTO

48TK4963 INSTALLATION KIT (Model Year 2007 & Later) INCLUDED IN 48TK4962

QTY	PART NO.	DESCRIPTION
1	49T38282	Bracket Solenoid
1	49T38269	Bracket
1	49T38268	Tubing Suction
1	49T38253	Tubing Discharge
1	49T38270	Tubing Engage
1	49T38281	Tubing Pressure
1	49T38280	Tubing Vent
1	49TK4860	Shield Kit
1	48TK4963	Kit (Content at Right)
		` '

QTY	PART NO.	DESCRIPTION	QTY	PART NO.	DESCRIPTION
1 1 1 1 1 1 1 1 1 4	52MK1009 20TK4058 35T37928 30T37954 36MK3841 22T38325 49T38322 49T38393 49T38295 43M68014	Gasket Kit Stud Kit Solenoid Valve Press. Switch – 12v Label Packet-English Nut-U Clamp Clamp Bracket Adapter-Hydraulic 90	1 2 2 2 3 2 2 1 1	43T38392 43T36431 19T37726 22T21723 19T37440 19T36623 22MX2520 30T38371 34T40692 49T38294 21T23153	Adapter-Hydraulic 90 Adapter-Hyd. Straight Hex Head Bolt Nut Bolt Bolt Nut Switch Wire Harness Shield Washer
1	43T38323	Adapter-Hydraulic 90	1	13M13541	Gasket

48TK4415 Installation Kit for GM Model Year 2001-2006

GA6 & GM6 ASSEMBLY

FOR PROPER INSTALLATION AND ADJUSTMENT OF THE TAPERED INPUT BEARINGS

- 1. Lubricate bearings and races with lithium based bearing grease.
- 2. Place input bearing into input gear and slide this group into housing to line up idler shaft.
- 3. Tap idler shaft into housing and through both bearing races.


4. Tap idler shaft in the reverse direction so that it is flush with bearing in this assembly. Insert the thickest shim that can be installed **by hand** in the gap between bearing and housing.


Rotate input gear to ensure it is not


excessively tight or loose. Recommended

bearing pre-load is .002 loose to .006 loose. Note the location of Shim in Step 4 of diagram is on opposite side of gear than set screw.

5. Tap idler shaft into position and install set screw.







STEP 4 STEP 5

20TK4058 STUD KIT

FOR GA6B OR GM6B SERIES



ITEM	QTY	PART NO.	DESCRIPTION
1	2	19T35778	10mm Capscrew
2	4	20T37952	10mm Step Stud
3	4	22T37605	Whiz-Lock Nut

35T37928 SOLENOID VALVE

35T36092 Replacement Cartridge Contains the Following:

QTY	PART NO.	DESCRIPTION
1 1	22T36498 37T36496	Retaining Nut 12v Coil
1	35T37997 12TK3902	Valve Stem Seal Kit



Muncie Power Products, Inc. Member of the Interpump Hydraulics Group General Offices and Distribution Center • P.O. Box 548 • Muncie, IN 47308-0548 (765) 284-7721 • FAX (765) 284-6991 • E-mail info@munciepower.com Web site http://www.munciepower.com



